


How to Disable Anonymous Access for Carbon Coder Web Interface


In certain situations it may be suggested to have users login to use the Web Interface. With a standard Microsoft Windows 2003 server installation by default the Internet Information Services (IIS) manager settings for web sites is set to allow anonymous access. Under this configuration the Web Interface for Carbon Server can be accessed by any user with the address to the Web Interface. You will find instructions below on how to disable anonymous access. Once this is done only users with a username and password for the Carbon server machine can access the Web UI. You can have the system administrator for the machine create a user login specifically to access the Carbon Coder Web UI.

Instructions for disabling Anonymous Access for the Carbon Coder Web Interface (default.htm):

1. Go to Start → Control Panel → Administrative Tools. Open up the Internet Information Services (IIS) Manager.
2. Select 'Default Web Site' under 'Web Sites'. Right click on 'default.htm' and select properties in the right panel.

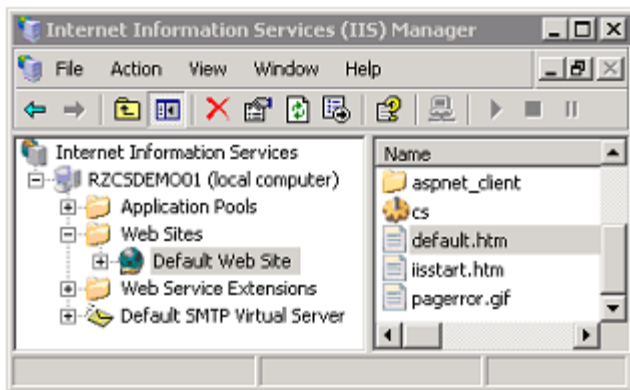

3. Select the 'Edit' button under the File Security tab in the 'Authentication and access control section'.

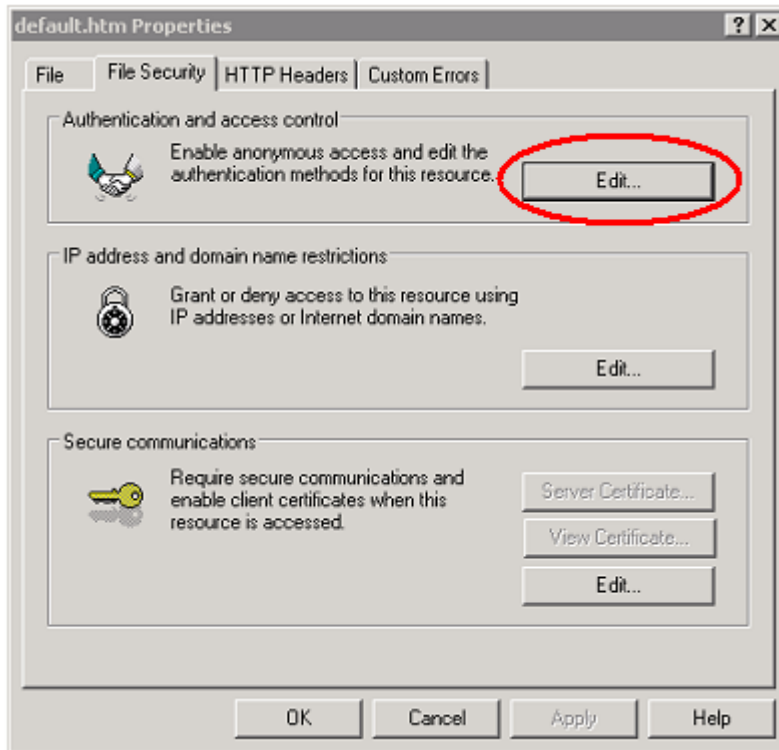

4. Uncheck the 'Enable anonymous access' option

